



ASTRAPI

(CABLE SUSPENDED)

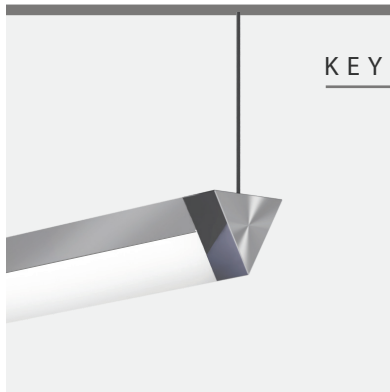

KEY FEATURES

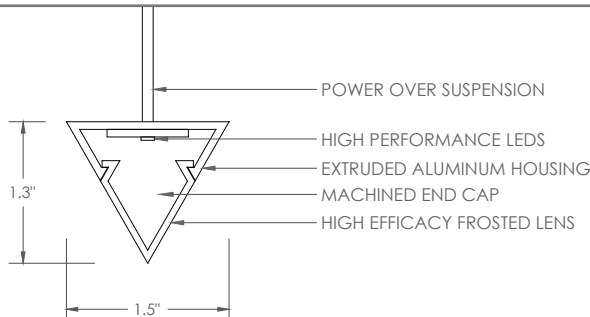

- EXTRUDED ALUMINUM HOUSING
- NO DIODE IMAGING
- MACHINED END CAPS
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



BUILD YOUR FIXTURE

AST

MOUNTING	NOMINAL LENGTH	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER	HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
----------	----------------	-----------	--------------	---------	--------	----------------	----------------	--------------------	------------	-------------	-----------	---------

MOUNTING	NOMINAL LENGTH	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER
CSD Cable Suspended Direct	2 2' 3 3'	827 2700K 80CRI 830 3000K 80CRI	VLO Very Low Output 4W 467 Lm /Ft.	U Universal 1 120v 2 227v	1D 0-10v dim to 1% 0D 0-10v dim to .1%
CSI Cable Suspended Indirect	4 4' 5 Cont. Run	835 3500K 80CRI 840 4000K 80CRI	LO Low Output 6W 690 Lm /Ft.		LDE1 Lutron Ecosystem 1%
CSR Cable Suspended Rotational	CR Custom CS Shapes	927 2700K 90CRI 930 3000K 90CRI 935 3500K 90CRI 940 4000K 90CRI RGB RGB RGBW RGBW CLED Custom LED Board	MO Medium Output 8W 913 Lm /Ft. HO High Output 10W 1137 Lm /Ft. VHO Very High Output 12W 1360 Lm /Ft. CPO Custom Power Output		LDE5 Lutron Ecosystem 5% CD Custom Driver (consult factory)

HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	
SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	MF Machined Finish P Polished SW Satin White MB Matte Black CF Custom Finish	44W 4" White canopies 44B 4" Black canopies 44M 4" Machined canopies 44C 4" Custom canopies 41W 4" Power feed canopy, 1-1/4" trim ring (white) 41B 4" Power feed canopy, 1-1/4" trim ring (black) 41M 4" Power feed canopy, 1-1/4" trim ring (machined) 41C 4" Power feed canopy, 1-1/4" trim ring (custom)	POS Power Over Suspension	2 2' 4 4' 6 6' 8 8' CL Custom Length	X No EM EM7 7 Watt EM EM10 10 Watt EM EMW Emergency Wiring (system by others)	

FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available
- Machined aluminum end caps with no visible fasteners are standard

DIANOITKÓS (MENTAL)

- The Astrapi comes in two options for light performance, direct and indirect
- Contact the factory for optional controls including daylight and occupancy sensors



PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty

ASTRAPI

(ROTATIONAL ARM MOUNT)

KEY FEATURES

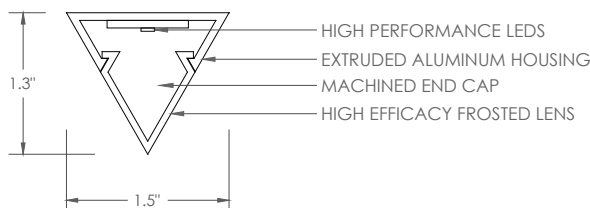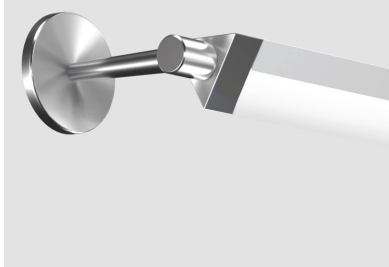

- EXTRUDED ALUMINUM HOUSING
- NO DIODE IMAGING
- MACHINED END CAPS
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



BUILD YOUR FIXTURE

AST

MOUNTING	NOMINAL LENGTH	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER	HOUSING FINISH	END CAP FINISH	DRIVER HOUSING FINISH	ARM LENGTH	EMERGENCY
MOUNTING	NOMINAL LENGTH	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER					
RAM Rotational Arm Mount	2 2' 3 3' 4 4' CR Cont. Run	827 2700K 80CRI 830 3000K 80CRI 835 3500K 80CRI 840 4000K 80CRI 927 2700K 90CRI 930 3000K 90CRI 935 3500K 90CRI 940 4000K 90CRI RGB RGB RGBW RGBW CLED Custom LED Board	VLO Very Low Output 4W 467 Lm /Ft. LO Low Output 6W 690 Lm /Ft. MO Medium Output 8W 913 Lm /Ft. HO High Output 10W 1137 Lm /Ft. VHO Very High Output 12W 1360 Lm /Ft. CPO Custom Power Output	U Universal 1 120v 2 227v	1D 0-10v dim to 1% 0D 0-10v dim to .1% LDE1 Lutron Ecosystem 1% LDE5 Lutron Ecosystem 5% CD Custom Driver (consult factory)					

HOUSING FINISH	END CAP FINISH	DRIVER HOUSING FINISH	ARM LENGTH	EMERGENCY
SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	MF Machined Finish P Polished SW Satin White MB Matte Black CF Custom Finish	M Mill SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	3 3" 6 6" 9 9" 12 12" CD Custom Distance	X No EM EM7 7 Watt EM EM10 10 Watt EM EMW Emergency Wiring (system by others)

FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available
- Machined aluminum end caps with no visible fasteners are standard

DIANOITKÓS (MENTAL)

- The Astrapi comes in two options for light performance, direct and indirect
- Contact the factory for optional controls including daylight and occupancy sensors

PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty

ASTRAPI


(PHOTOMETRICS)

PERFORMANCE DATA

DATA BASED ON 12 WATTS PER FT., 4000K CCT.

POWER/LUMEN OUTPUT			
DRIVER POWER	WATTS/FT.	LUMENS/FT.	LUMENS/W
A	4	467	107
B	6	690	105
C	8	913	106
D	10	1137	104
E	12	1360	103

CONE OF LIGHT TABULATION			
MOUNTING HEIGHT (FT)		LIGHT LEVEL (FC)	DIAMETER (FT)
6.00		50.9	4.8
8.00		28.6	6.4
10.0		18.3	8.0
12.0		12.7	9.5
14.0		9.4	11.1
16.0		7.2	12.7

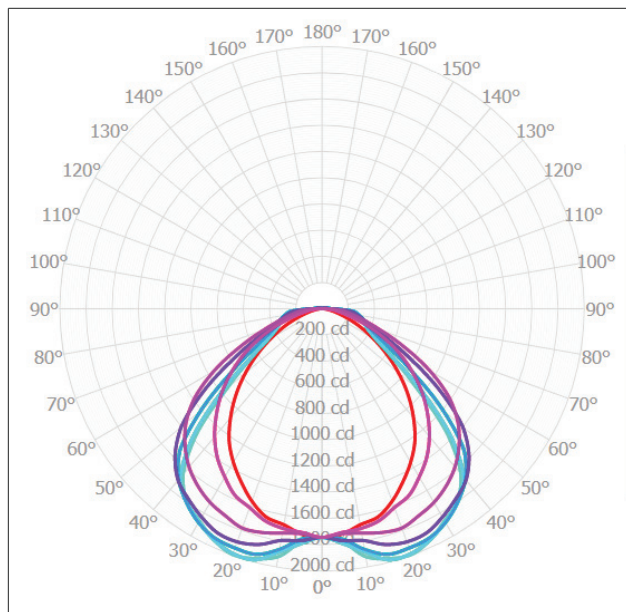

0° - 180°	45° - 225°	90° - 270°	135° - 315°
15° - 195°	60° - 240°	105° - 285°	150° - 330°
30° - 210°	75° - 255°	120° - 300°	160° - 345°

TOTAL LUMEN OUTPUT: 5440 LUMENS

MAXIMUM CANDELA: 1995 CANDELA

FIXTURE EFFICACY: 103 LUMENS/W*

*FIXTURE EFFICACY CAN BE INCREASED BY REDUCING DRIVER POWER.

BEAM AND FIELD INFORMATION	
CIE TYPE	DIRECT/INDIRECT
CENTER BEAM INTENSITY:	? CANDELA
CENTRAL CONE INTENSITY:	? CANDELA
BEAM FLUX:	? LUMENS
BEAM ANGLE (0-180):	? DEGREES
FIELD ANGLE (90-270):	? DEGREES
FIELD ANGLE (0-180):	? DEGREES
BEAM ANGLE (90-270):	? DEGREES

ASTRAPI


(OPTIONS)

FINISH OPTIONS

HOUSING



SATIN CLEAR




WHITE




BLACK

END CAPS



MACHINED
ALUMINUM



WHITE



BLACK



HYGIEIA IN CUSTOM RED

CUSTOM FINISHES

HOUSING



RAL
POWDERCOAT




CUSTOM
ANODIZED

END CAPS



RAL
POWDERCOAT

CANOPIES



MACHINED
ALUMINUM



RAL
POWDERCOAT