
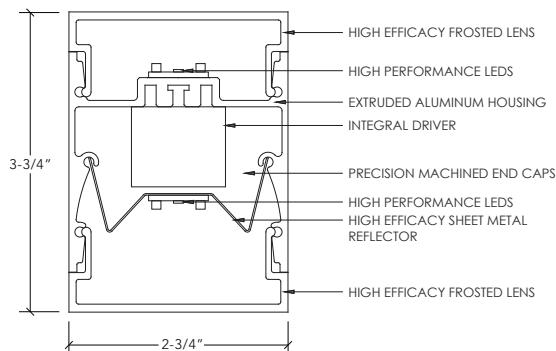


ATHENA

(CABLE SUSPENDED)

KEY FEATURES

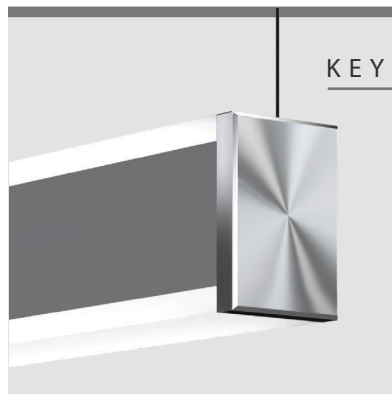

- EXTRUDED ALUMINUM HOUSING
- NO DIODE IMAGING
- MACHINED END CAPS
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



BUILD YOUR FIXTURE

ATH

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER	HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
----------	----------------	-----------	---------------	-----------------	---------	--------	----------------	----------------	--------------------	------------	-------------	-----------	---------

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER
CSB Cable Suspended Bi-Directional	2 2'	827 2700K 80CRI	VLO Very Low Output 4W 524 Lm /Ft.	VLO Very Low Output 4W 524 Lm /Ft.	U Universal 1 120v 2 227v	1D 0-10v dim to 1%
	3 3'	830 3000K 80CRI	LO Low Output 6W 731 Lm /Ft.	LO Low Output 6W 731 Lm /Ft.		0D 0-10v dim to .1%
	4 4'	835 3500K 80CRI	MO Medium Output 8W 985 Lm /Ft.	MO Medium Output 8W 985 Lm /Ft.		LDE1 Lutron Ecosystem 1%
	5 5'	840 4000K 80CRI	HO High Output 10W 1244 Lm /Ft.	HO High Output 10W 1244 Lm /Ft.		LDE5 Lutron Ecosystem 5%
	6 6'	927 2700K 90CRI	VHO Very High Output 12W 1475.5 Lm /Ft.	VHO Very High Output 12W 1475.5 Lm /Ft.		CD Custom Driver (consult factory)
	7 7'	930 3000K 90CRI	CPO Custom Power Output	CPO Custom Power Output		
	8 8'	935 3500K 90CRI				
	12 12'	940 4000K 90CRI				
	CR Cont. Run	RGB RGB				
	CS Custom Shapes	RGBW RGBW CLED Custom LED Board				

HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
M Mill SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	MF Machined Finish P Polished SW Satin White MB Matte Black CF Custom Finish	44W 4" White canopies 44B 4" Black canopies 44M 4" Machined canopies 44C 4" Custom canopies 41W 4" Power feed canopy, 1-1/4" trim ring (white) 41B 4" Power feed canopy, 1-1/4" trim ring (black) 41M 4" Power feed canopy, 1-1/4" trim ring (machined) 41C 4" Power feed canopy, 1-1/4" trim ring (custom)	W White B Black CU Custom POS Power Over Suspension (Requires remote driver - Consult factory)	2 2' 4 4' 6 6' 8 8' CL Custom Length	X No EM EM7 7 Watt EM EM10 10 Watt EM EMW Emergency Wiring (system by others)	SHAPES Shapes DS Dual Switching NL nLight Sensor LS Lutron Sensor OS Other Sensor

FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available
- Machined aluminum end caps with no visible fasteners are standard

DIANOITKÓS (MENTAL)

- The Athena comes in three options for light performance, direct, indirect, and bidirectional
- Contact the factory for optional controls including daylight and occupancy sensors


PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty

ATHENA

(SURFACE MOUNTED)

KEY FEATURES

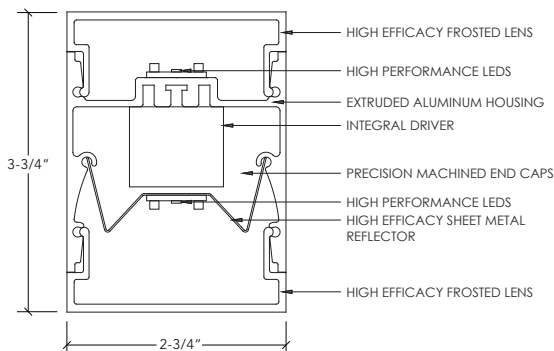

- EXTRUDED ALUMINUM HOUSING
- NO DIODE IMAGING
- MACHINED END CAPS
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



BUILD YOUR FIXTURE

ATH

MOUNTING

NOMINAL
LENGTH

CCT / CRI

DIRECT
OUTPUT

INDIRECT
OUTPUT

VOLTAGE

DRIVER

HOUSING
FINISH

END CAP
FINISH

OFFSET
DISTANCE

EMERGENCY

OPTIONS

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER
SMS Surface	2 2'	827 2700K 80CRI	VLO Very Low Output	VLO Very Low Output	U Universal	1D 0-10v dim
Mount Side	3 3'	830 3000K 80CRI	4W 524 Lm /Ft.	4W 524 Lm /Ft.	1 120v	to 1%
SMT Surface	4 4'	835 3500K 80CRI	LO Low Output	LO Low Output	2 227v	0D 0-10v dim
Mount Top	5 5'	840 4000K 80CRI	6W 731 Lm /Ft.	6W 731 Lm /Ft.		to .1%
SME Surface	6 6'	927 2700K 90CRI	MO Medium Output	MO Medium Output		LDE1 Lutron
Mount End	7 7'	930 3000K 90CRI	8W 985 Lm /Ft.	8W 985 Lm /Ft.		Ecosystem 1%
	8 8'	935 3500K 90CRI	HO High Output	HO High Output		LDE5 Lutron
	12 12'	940 4000K 90CRI	10W 1244 Lm /Ft.	10W 1244 Lm /Ft.		Ecosystem 5%
	CR Cont. Run	RGB RGB	VHO Very High Output	VHO Very High Output		CD Custom Driver
	CS Custom Shapes	RGBW RGBW	12W 1475.5 Lm /Ft.	12W 1475.5 Lm /Ft.		(consult factory)
		CLED Custom LED Board	CPO Custom Power Output	CPO Custom Power Output		

HOUSING FINISH	END CAP FINISH	OFFSET DISTANCE	EMERGENCY	OPTIONS
M Mill	MF Machined Finish	0 Flush	X No EM	SHAPES Shapes
SC Satin Clear	P Polished	(5/8" offset)	EM7 7 Watt EM	DS Dual Switching
SW Satin White	SW Satin White	1 1"	EM10 10 Watt EM	NL nLight Sensor
MB Matte Black	MB Matte Black	2 2"	EMW Emergency Wiring	LS Lutron Sensor
CF Custom Finish	CF Custom Finish	3 3"	(system by others)	OS Other Sensor
		4 4"		
		6 6"		
		CD Custom Distance		

FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available
- Machined aluminum end caps with no visible fasteners are standard

DIANOITKÓS (MENTAL)

- The Athena comes in three options for light performance, direct, indirect, and bidirectional
- Contact the factory for optional controls including daylight and occupancy sensors

PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty

ATHENA


(PHOTOMETRICS)

PERFORMANCE DATA

DATA BASED ON 12 WATTS PER FT., 4000K CCT.

POWER/LUMEN OUTPUT			
DRIVER POWER	WATTS/FT.	LUMENS/FT.	LUMENS/W
A	4	524	131
B	6	731	128
C	8	985	125
D	10	1244	122
E	12	1475.5	117.2

CONE OF LIGHT TABULATION			
MOUNTING HEIGHT (FT)		FOOT-CANDLES AT NADIR	DIAMETER (FT)
4.00		129	4.97
6.00		57.4	7.46
8.00		32.3	9.94
10.0		20.6	12.4
12.0		14.3	14.9
14.0		10.5	17.4
16.0		8.07	19.9

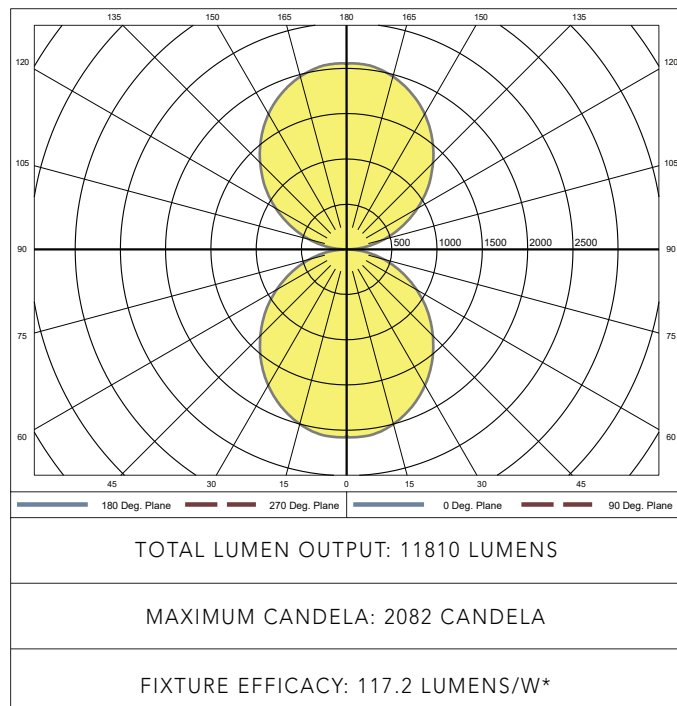

*FIXTURE EFFICACY CAN BE INCREASED BY REDUCING DRIVER POWER.

BEAM AND FIELD INFORMATION	
CIE TYPE	DIRECT/INDIRECT
CENTER BEAM INTENSITY:	2065 CANDELA
CENTRAL CONE INTENSITY:	2062 CANDELA
BEAM FLUX:	8374.7 LUMENS
BEAM ANGLE (0-180):	109.4 DEGREES
FIELD ANGLE (90-270):	111.8 DEGREES
FIELD ANGLE (0-180):	163.8 DEGREES
BEAM ANGLE (90-270):	165.2 DEGREES

ATHENA


(OPTIONS)

FINISH OPTIONS


HOUSING



SATIN CLEAR





WHITE



BLACK

END CAPS


MACHINED
ALUMINUM


WHITE



BLACK



HYGIEIA IN CUSTOM RED

CUSTOM FINISHES

HOUSING



RAL
POWDERCOAT

CUSTOM
ANODIZED

END CAPS


RAL
POWDERCOAT

CANOPIES


MACHINED
ALUMINUM

RAL
POWDERCOAT

xýlo



Artience lighting extends the beauty of nature indoors with xýlo. Wood has a beauty and a warmth that elevates our fixtures while at the same time affecting positive changes within a space. Whether it is the sound dampening effect of wood, the calming effect that it can have on humans, or just the sheer beauty of exotic woods hand crafted into works of linear-lighting art, xýlo will give you countless options to meet your design needs.



HYGIEIA + XÝLO

XÝLO OPTIONS



TEAK



WALNUT


WHITE
OAK


BUBINGA


CREATE YOUR
DREAM OPTION