
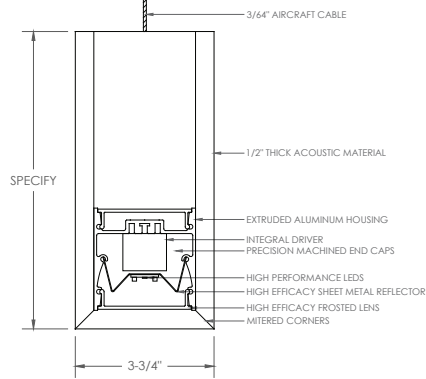


# HESYCHIA

(CABLE SUSPENDED)

## KEY FEATURES

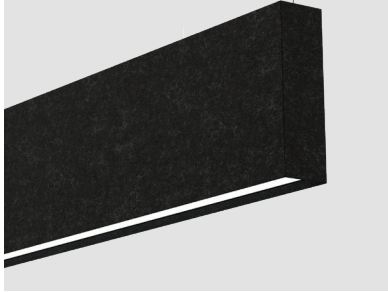

- BEAUTIFULLY CRAFTED
- NUMEROUS COLOR OPTIONS
- CUSTOM SIZING
- NO DIODE IMAGING
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



## BUILD YOUR FIXTURE

### HES

MOUNTING	NOMINAL LENGTH	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER	HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
----------	----------------	-----------	--------------	---------	--------	----------------	----------------	--------------------	------------	-------------	-----------	---------

MOUNTING	NOMINAL LENGTH	NOMINAL HEIGHT	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER
CSD Cable Suspended Direct	2 2' 3 3'	8 8" 10 10"	827 2700K 80CRI 830 3000K 80CRI	VLO Very Low Output 4W 524 Lm /Ft.	U Universal 1 120v 2 227v	1D 0-10v dim to 1%
CSI Cable Suspended Indirect	4 4' 5 5' 6 6' 7 7' 8 8' 12 12'	12 12" CH Custom Height	835 3500K 80CRI 840 4000K 80CRI 927 2700K 90CRI 930 3000K 90CRI 935 3500K 90CRI 940 4000K 90CRI	LO Low Output 6W 731 Lm /Ft. MO Medium Output 8W 985 Lm /Ft. HO High Output 10W 1244 Lm /Ft.		LDE1 Lutron Ecosystem 1% LDE5 Lutron Ecosystem 5%
CR Cont. Run	RGB	RGB	RGB	VHO Very High Output 12W 1475.5 Lm /Ft.		CD Custom Driver (consult factory)
CS Custom Shapes	RGBW	RGBW	RGBW	CPO Custom Power Output		
	CLED	CLED	CLED			

HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
M Mill	MF Machined Finish	44W 4" White canopies	W White	2 2'	X No EM	SHAPES Shapes
SC Satin Clear	P Polished	44B 4" Black canopies	B Black	4 4'	EM7 7 Watt EM	NL nLight Sensor
SW Satin White	SW Satin White	44M 4" Machined canopies	CU Custom	6 6'	EM10 10 Watt EM	LS Lutron Sensor
MB Matte Black	MB Matte Black	44C 4" Custom canopies		8 8'	EMW Emergency Wiring (system by others)	OS Other Sensor
CF Custom Finish	CF Custom Finish	41W 4" Power feed canopy, 1-1/4" trim ring (white)		CL Custom Length		
		41B 4" Power feed canopy, 1-1/4" trim ring (black)				
		41M 4" Power feed canopy, 1-1/4" trim ring (machined)				
		41C 4" Power feed canopy, 1-1/4" trim ring (custom)				

### FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available

### DIANOITKÓS (MENTAL)

- The Hesychia comes in two options for light performance, direct and indirect
- Contact the factory for optional controls including daylight and occupancy sensors



### PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty

# HESYCHIA

(SURFACE MOUNTED)

## KEY FEATURES

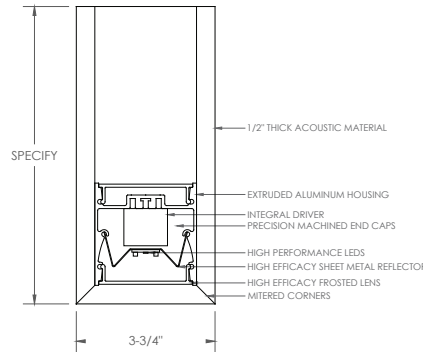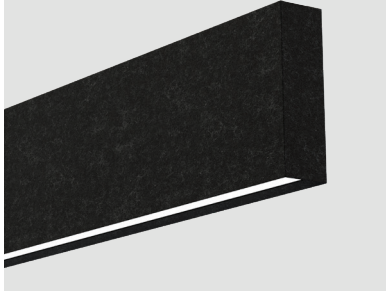

- BEAUTIFULLY CRAFTED
- NUMEROUS COLOR OPTIONS
- CUSTOM SIZING
- NO DIODE IMAGING
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



## BUILD YOUR FIXTURE

### HES

MOUNTING	NOMINAL LENGTH	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER	HOUSING FINISH	END CAP FINISH	OFFSET DISTANCE	EMERGENCY	OPTIONS
----------	----------------	-----------	--------------	---------	--------	----------------	----------------	-----------------	-----------	---------

MOUNTING	NOMINAL LENGTH	NOMINAL HEIGHT	CCT / CRI	POWER OUTPUT	VOLTAGE	DRIVER
SMS Surface Mount Side	2 2' 3 3'	8 8" 10 10"	827 2700K 80CRI 830 3000K 80CRI	VLO Very Low Output 4W 524 Lm /Ft.	U Universal 1 120v 2 227v	1D 0-10v dim to 1%
SMT Surface Mount Top	4 4' 5 5'	12 12" CH Custom Height	835 3500K 80CRI 840 4000K 80CRI	LO Low Output 6W 731 Lm /Ft.		0D 0-10v dim to .1%
SME Surface Mount End	6 6' 7 7' 8 8' 12 12'		927 2700K 90CRI 930 3000K 90CRI 935 3500K 90CRI 940 4000K 90CRI	MO Medium Output 8W 985 Lm /Ft. HO High Output 10W 1244 Lm /Ft.		LDE1 Lutron Ecosystem 1%
	CR Cont. Run CS Custom Shapes		RGB RGB RGBW RGBW CLED Custom LED Board	VHO Very High Output 12W 1475.5 Lm /Ft. CPO Custom Power Output		LDE5 Lutron Ecosystem 5%
						CD Custom Driver (consult factory)

HOUSING FINISH	END CAP FINISH	OFFSET DISTANCE	EMERGENCY	OPTIONS
M Mill SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	MF Machined Finish P Polished SW Satin White MB Matte Black CF Custom Finish	0 Flush (5/8" offset) 1 1" 2 2" 3 3" 4 4" 6 6" CD Custom Distance	X No EM EM7 7 Watt EM EM10 10 Watt EM EMW Emergency Wiring (system by others)	SHAPES Shapes NL nLight Sensor LS Lutron Sensor OS Other Sensor

### FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available

### DIANOITKÓS (MENTAL)

- The Hesychia comes in two options for light performance, direct and indirect
- Contact the factory for optional controls including daylight and occupancy sensors

### PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty


# HESYCHIA


(PHOTOMETRICS)

## PERFORMANCE DATA

DATA BASED ON 12 WATTS PER FT., 4000K CCT.

POWER/LUMEN OUTPUT			
DRIVER POWER	WATTS/FT.	LUMENS/FT.	LUMENS/W
A	4	524	131
B	6	731	128
C	8	985	125
D	10	1244	122
E	12	1475.5	117.2

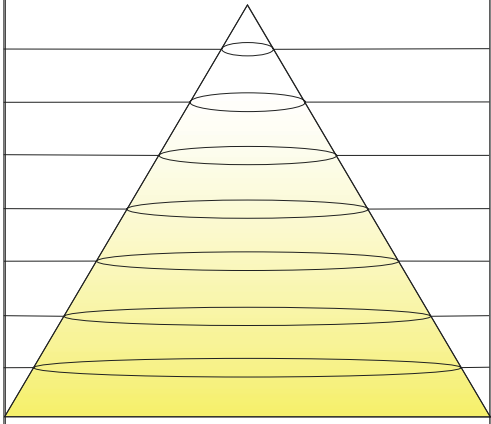CONE OF LIGHT TABULATION			
MOUNTING HEIGHT (FT)		FOOT-CANDLES AT NADIR	DIAMETER (FT)
4.00		129	4.97
6.00		57.4	7.46
8.00		32.3	9.94
10.00		20.6	12.4
12.00		14.3	14.9
14.00		10.5	17.4
16.00		8.07	19.9

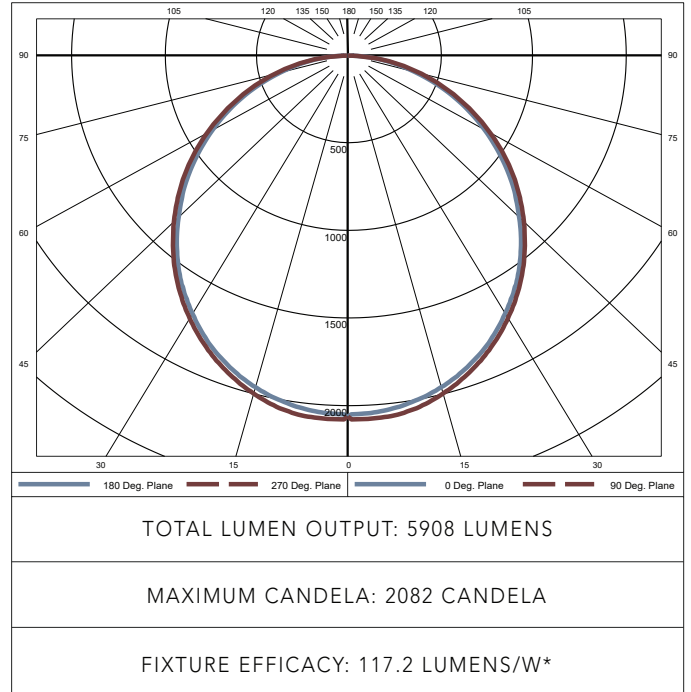

\*FIXTURE EFFICACY CAN BE INCREASED BY REDUCING DRIVER POWER.

BEAM AND FIELD INFORMATION	
CIE TYPE	DIRECT/INDIRECT
CENTER BEAM INTENSITY:	2065 CANDELA
CENTRAL CONE INTENSITY:	2062 CANDELA
BEAM FLUX:	8374.7 LUMENS
BEAM ANGLE (0-180):	109.4 DEGREES
FIELD ANGLE (90-270):	111.8 DEGREES
FIELD ANGLE (0-180):	163.8 DEGREES
BEAM ANGLE (90-270):	165.2 DEGREES

# HESYCHIA

(NEED HEADER FOR THIS)

## FIXTURE HOUSING OPTIONS



ARCHAIC  
152B



BLUE  
336B



EMERALD  
476B



LIME  
431B



MANDARINE  
631B



RUBY  
651B



CAMEL  
231B




FLAX  
221B



ZINC  
121B



MARBLE HEATH  
116B



CHARCOAL HEATH  
175B




PURE BLACK  
190B



DEEP BLUE  
370B

## INFORMATION

- 12MM THICK ACOUSTIC PANEL
- NRC BETWEEN .45 - 1.0
- CLASS A FIRE RATED
- 0 - 10V, 1% DIMMING ??
- NUMEROUS DESIGNS POSSIBLE

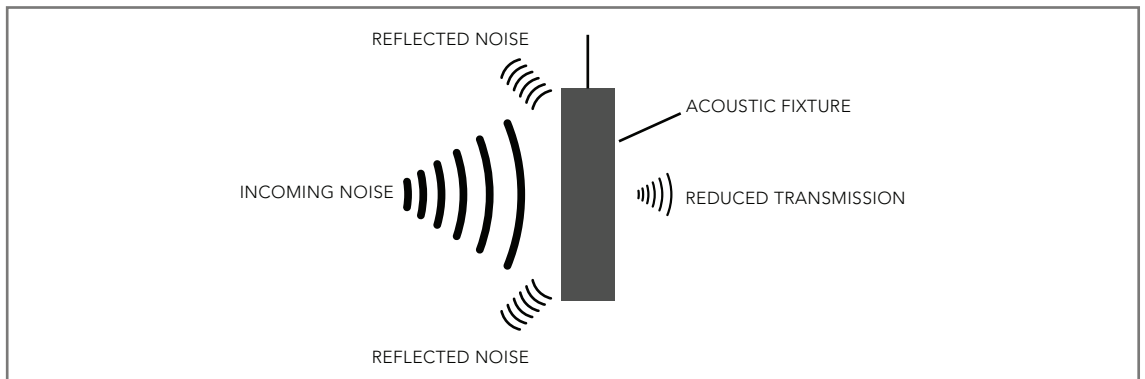

## FAQ

### 1. HOW MUCH WILL A FIXTURE REDUCE SOUND?

THE HESYCHIA FEATURES A NOISE REDUCTION COEFFICIENT (NRC) BETWEEN .45 AND 1.00, DEPENDING ON THE INSTALLATION.

### 2. ARE THE PANELS FIRE RESISTANT?

THE HESYCHIA FEATURES ACOUSTIC PANELS THAT ARE CLASS A FIRE RATED.

### 3. CAN ADDITIONAL NON-ILLUMINATED BAFFLES BE ORDERED?

ADDITIONAL NON-ILLUMINATED BAFFLES CAN BE ORDERED.