
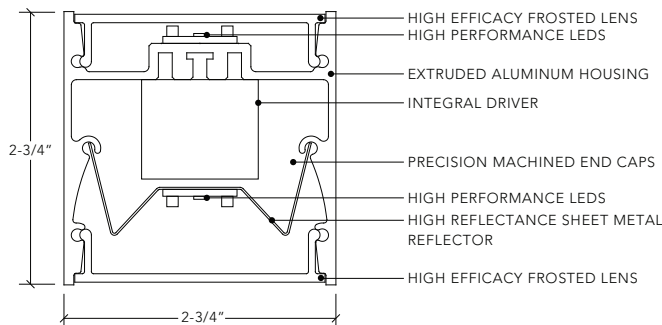


HYGIEIA

(CABLE SUSPENDED)

KEY FEATURES

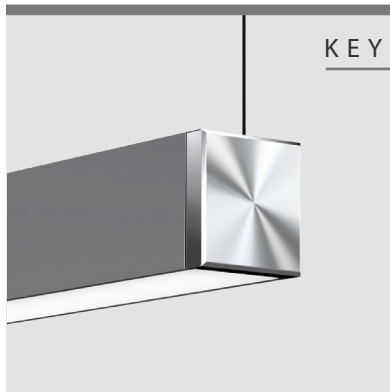

- EXTRUDED ALUMINUM HOUSING
- NO DIODE IMAGING
- MACHINED END CAPS
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



BUILD YOUR FIXTURE

HYG

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER	HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
----------	----------------	-----------	---------------	-----------------	---------	--------	----------------	----------------	--------------------	------------	-------------	-----------	---------

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER
CSB Cable Suspended Bi-Directional	2 2' 3 3' 4 4' 5 5' 6 6' 7 7' 8 8' 12 12' CR Cont. Run CS Custom Shapes	827 2700K 80CRI 830 3000K 80CRI 835 3500K 80CRI 840 4000K 80CRI 927 2700K 90CRI 930 3000K 90CRI 935 3500K 90CRI 940 4000K 90CRI RGB RGB RGBW RGBW CLED Custom LED Board	VLO Very Low Output 4W 520 Lm /Ft. LO Low Output 6W 765 Lm /Ft. MO Medium Output 8W 990 Lm /Ft. HO High Output 10W 1190 Lm /Ft. VHO Very High Output 12W 1395 Lm /Ft.	VLO Very Low Output 4W 555 Lm /Ft. LO Low Output 6W 815 Lm /Ft. MO Medium Output 8W 1060 Lm /Ft. HO High Output 10W 1285 Lm /Ft. VHO Very High Output 12W 1495 Lm /Ft.	U Universal 1 120v 2 227v	1D 0-10v dim to 1% 0D 0-10v dim to .1% LDE1 Lutron Ecosystem 1% LDE5 Lutron Ecosystem 5% CD Custom Driver (consult factory)

HOUSING FINISH	END CAP FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
M Mill SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	MF Machined Finish P Polished SW Satin White MB Matte Black CF Custom Finish	44W 4" White canopies 44B 4" Black canopies 44M 4" Machined canopies 44C 4" Custom canopies 41W 4" Power feed canopy, 1-1/4" trim ring (white) 41B 4" Power feed canopy, 1-1/4" trim ring (black) 41M 4" Power feed canopy, 1-1/4" trim ring (machined) 41C 4" Power feed canopy, 1-1/4" trim ring (custom)	W White B Black CU Custom POS Power Over Suspension (Requires remote driver - Consult factory)	2 2' 4 4' 6 6' 8 8' CL Custom Length	X No EM EM7 7 Watt EM EM10 10 Watt EM EMW Emergency Wiring (system by others)	SHAPES Shapes DS Dual Switching NL nLight Sensor LS Lutron Sensor OS Other Sensor

FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available
- Machined aluminum end caps with no visible fasteners are standard

DIANOITKÓS (MENTAL)

- The hygieia comes in three options for light performance, direct, indirect, and bidirectional
- Contact the factory for optional controls including daylight and occupancy sensors


PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty

HYGIEIA

(SURFACE MOUNTED)

KEY FEATURES

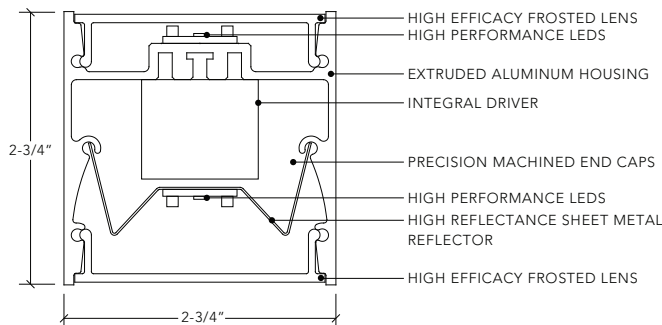

- EXTRUDED ALUMINUM HOUSING
- NO DIODE IMAGING
- MACHINED END CAPS
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



BUILD YOUR FIXTURE

HYG

MOUNTING

NOMINAL
LENGTH

CCT / CRI

DIRECT
OUTPUT

INDIRECT
OUTPUT

VOLTAGE

DRIVER

HOUSING
FINISH

END CAP
FINISH

OFFSET
DISTANCE

EMERGENCY

OPTIONS

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER
SMS Surface Mount Side	2 2'	827 2700K 80CRI	VLO Very Low Output 4W 520 Lm /Ft.	VLO Very Low Output 4W 555 Lm /Ft.	U Universal	1D 0-10v dim to 1%
SMT Surface Mount Top	3 3'	830 3000K 80CRI	LO Low Output 6W 765 Lm /Ft.	LO Low Output 6W 815 Lm /Ft.	1 120v	0D 0-10v dim to .1%
SME Surface Mount End	4 4'	840 4000K 80CRI	MO Medium Output 8W 990 Lm /Ft.	MO Medium Output 8W 1060 Lm /Ft.	2 227v	LDE1 Lutron Ecosystem 1%
	5 5'	927 2700K 90CRI	HO High Output 10W 1190 Lm /Ft.	HO High Output 10W 1285 Lm /Ft.		LDE5 Lutron Ecosystem 5%
	6 6'	930 3000K 90CRI	VHO Very High Output 12W 1395 Lm /Ft.	VHO Very High Output 12W 1495 Lm /Ft.		CD Custom Driver (consult factory)
	7 7'	935 3500K 90CRI				
	8 8'	940 4000K 90CRI				
	12 12'					
	CR Cont. Run	RGB RGB				
	CS Custom Shapes	RGBW RGBW				
		CLED Custom LED Board				

HOUSING FINISH	END CAP FINISH	OFFSET DISTANCE	EMERGENCY	OPTIONS
M Mill	MF Machined Finish	0 Flush (5/8" offset)	X No EM	SHAPES Shapes
SC Satin Clear	P Polished	1 1"	EM7 7 Watt EM	DS Dual Switching
SW Satin White	SW Satin White	2 2"	EM10 10 Watt EM	NL nLight Sensor
MB Matte Black	MB Matte Black	3 3"	EMW Emergency Wiring (system by others)	LS Lutron Sensor
CF Custom Finish	CF Custom Finish	4 4"		OS Other Sensor
		6 6"		
		CD Custom Distance		

FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available
- Machined aluminum end caps with no visible fasteners are standard

DIANOITKÓS (MENTAL)

- The hygieia comes in three options for light performance, direct, indirect, and bidirectional
- Contact the factory for optional controls including daylight and occupancy sensors

PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty



PROJECT NAME: _____

FIXTURE TYPE: _____

DATE: _____

QTY: _____

HYGIEIA

(PHOTOMETRICS)

PERFORMANCE DATA


DATA BASED ON 12 WATTS PER FT., 4000K CCT.

POWER/LUMEN OUTPUT

DRIVER POWER	WATTS/FT		LUMENS/FT		LUMENS/W
	DIRECT	INDIRECT	DIRECT	INDIRECT	
A	4	4	520	555	135
B	6	6	765	815	132
C	8	8	990	1060	128
D	10	10	1190	1285	124
E	12	12	1395	1495	120

CONE OF LIGHT TABULATION

MOUNTING HEIGHT (FT)		FOOT-CANDLES AT NADIR	DIAMETER (FT)
4.00		129	4.97
6.00		57.4	7.46
8.00		32.3	9.94
10.0		20.6	12.4
12.0		14.3	14.9
14.0		10.5	17.4
16.0		8.07	19.9

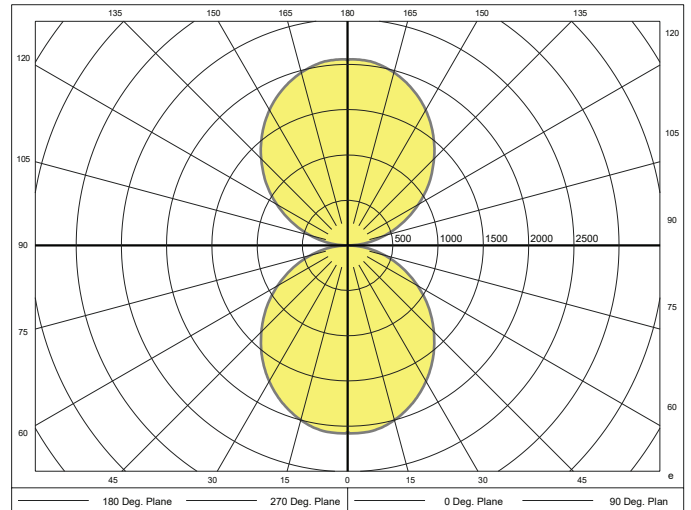

TOTAL LUMEN OUTPUT: 11810 LUMENS

MAXIMUM CANDELA: 2082 CANDELA

FIXTURE EFFICACY: 117.2 LUMENS/W*

*FIXTURE EFFICACY CAN BE INCREASED BY REDUCING DRIVER POWER.

BEAM AND FIELD INFORMATION

CIE TYPE	DIRECT/INDIRECT
FIELD ANGLE (90-270):	2065 CANDELA
FIELD ANGLE (0-180):	2062 CANDELA
BEAM ANGLE (90-270):	8374.7 LUMENS
BEAM ANGLE (0-180):	109.4 DEGREES
BEAM FLUX:	111.8 DEGREES
CENTRAL CONE INTENSITY:	163.8 DEGREES
CENTER BEAM INTENSITY:	165.2 DEGREES

HYGIEIA


(NEED HEADER FOR THIS)

FINISH OPTIONS

HOUSING



SATIN CLEAR





WHITE



BLACK


END CAPS


MACHINED
ALUMINUM


WHITE



BLACK



HYGIEIA IN CUSTOM RED

CUSTOM FINISHES

HOUSING



RAL
POWDERCOAT

CUSTOM
ANODIZED

END CAPS


RAL
POWDERCOAT

CANOPIES



MACHINED
ALUMINUM

RAL
POWDERCOAT

xýlo



Artience lighting extends the beauty of nature indoors with xýlo. Wood has a beauty and a warmth that elevates our fixtures while at the same time affecting positive changes within a space. Whether it is the sound dampening effect of wood, the calming effect that it can have on humans, or just the sheer beauty of exotic woods hand crafted into works of linear-lighting art, xýlo will give you countless options to meet your design needs.

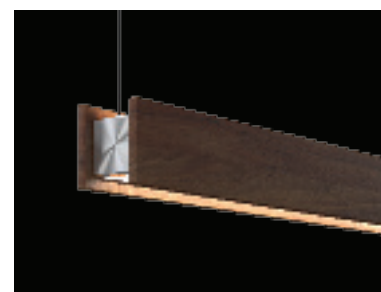

HYGIEIA + XÝLO

XÝLO OPTIONS



TEAK



WALNUT


WHITE
OAK


BUBINGA


CREATE YOUR
DREAM OPTION