



POSEIDON

(CABLE SUSPENDED)

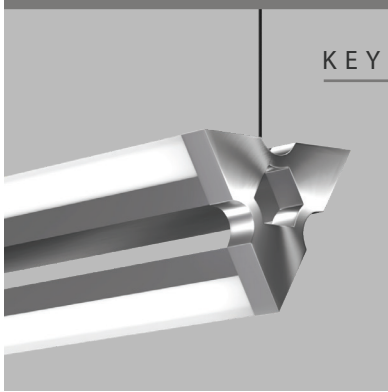

KEY FEATURES

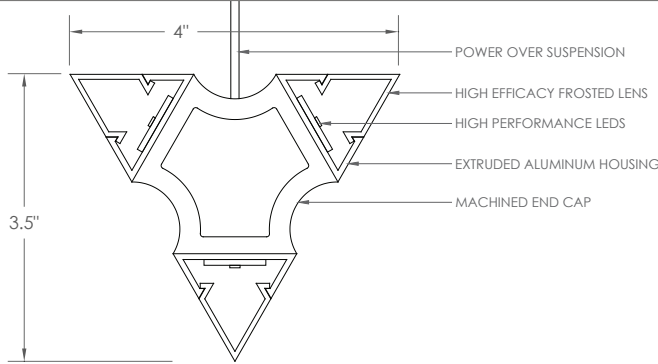

- EXTRUDED ALUMINUM HOUSING
- NO DIODE IMAGING
- MACHINED END CAPS
- MADE IN THE USA
- 5 YEAR WARRANTY
- UL LISTED FOR DRY/DAMP LOCATIONS



BUILD YOUR FIXTURE

POS

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER	HOUSING FINISH	END CAP FINISH	DRIVER HOUSING FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
----------	----------------	-----------	---------------	-----------------	---------	--------	----------------	----------------	-----------------------	--------------------	------------	-------------	-----------	---------

MOUNTING	NOMINAL LENGTH	CCT / CRI	DIRECT OUTPUT	INDIRECT OUTPUT	VOLTAGE	DRIVER
CS Cable Suspended CSV Cable Suspended Vertical	2 2' 3 3' 4 4' CR Cont. Run	827 2700K 80CRI 830 3000K 80CRI 835 3500K 80CRI 840 4000K 80CRI 927 2700K 90CRI 930 3000K 90CRI 935 3500K 90CRI 940 4000K 90CRI RGB RGB RGBW RGBW CLED Custom LED Board	VLO Very Low Output 4W 480 Lm /Ft. LO Low Output 6W 703 Lm /Ft. MO Medium Output 8W 918 Lm /Ft. HO High Output 10W 1111 Lm /Ft. VHO Very High Output 12W 1280 Lm /Ft. CPO Custom Power Output	VLO Very Low Output 8W 959 Lm /Ft. LO Low Output 12W 1407 Lm /Ft. MO Medium Output 16W 1835 Lm /Ft. HO High Output 20W 2222 Lm /Ft. VHO Very High Output 24W 2560 Lm /Ft. CPO Custom Power Output	U Universal 1 120v 2 227v	1D 0-10v dim to 1% 0D 0-10v dim to .1% LDE1 Lutron Ecosystem 1% LDE5 Lutron Ecosystem 5% CD Custom Driver (consult factory)

HOUSING FINISH	END CAP FINISH	DRIVER HOUSING FINISH	CANOPY SIZE/FINISH	POWER CORD	DROP LENGTH	EMERGENCY	OPTIONS
M Mill SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	MF Machined Finish P Polished SW Satin White MB Matte Black CF Custom Finish	M Mill SC Satin Clear SW Satin White MB Matte Black CF Custom Finish	44W 4" White canopies 44B 4" Black canopies 44M 4" Machined canopies 44C 4" Custom canopies	POS Power Over Suspension (Requires remote driver - Consult factory)	2 2' 4 4' 6 6' 8 8' CL Custom Length	X No EM EM7 7 Watt EM EM10 10 Watt EM EMW Emergency Wiring (system by others)	SHAPES Shapes DS Dual Switching NL nLight Sensor LS Lutron Sensor OS Other Sensor

FYSIKÓS (PHYSICAL)

- 6063 aluminum alloy is used to create a strong, light weight fixture housing
- 80+ CRI is standard; 90+ CRI is available
- Machined aluminum end caps with no visible fasteners are standard

DIANOITKÓS (MENTAL)

- The Poseidon comes in one option for light performance, bidirectional.
- Contact the factory for optional controls including daylight and occupancy sensors

PNUEMATIKÓS (SPIRITUAL)

- All artience lighting fixtures are proudly made in the usa
- Artience lighting fixtures are ul approved for dry/ damp locations (pending)
- All artience lighting fixtures are covered by our 5 year warranty


POSEIDON


(PHOTOMETRICS)

PERFORMANCE DATA

DATA BASED ON 12 WATTS PER FT., 4000K CCT.

POWER/LUMEN OUTPUT					
DRIVER POWER	WATTS/FT		LUMENS/FT		LUMENS/W
	DIRECT	INDIRECT	DIRECT	INDIRECT	
A	4	8	480	959	120
B	6	12	703	1407	117
C	8	16	918	1835	115
D	10	20	1111	2222	111
E	12	24	1280	2560	107

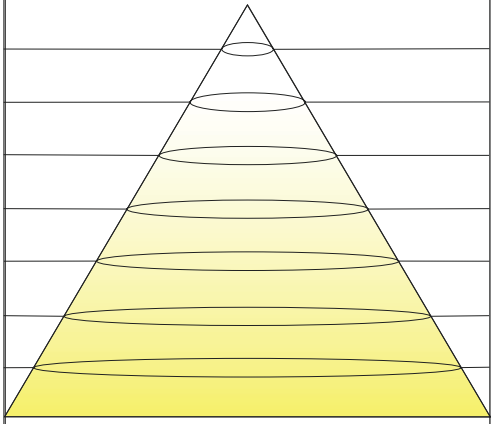CONE OF LIGHT TABULATION			
MOUNTING HEIGHT (FT)		LIGHT LEVEL (FC)	DIAMETER (FT)
6.00		50.9	4.8
8.00		28.6	6.4
10.00		18.3	8.0
12.00		12.7	9.5
14.00		9.4	11.1
16.00		7.2	12.7

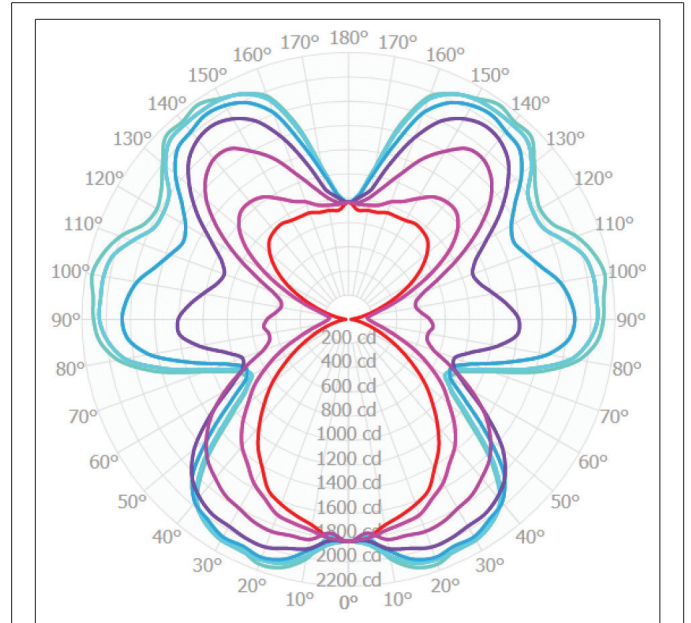

0° - 180°	45° - 225°	90° - 270°	135° - 315°
15° - 195°	60° - 240°	105° - 285°	150° - 330°
30° - 210°	75° - 255°	120° - 300°	160° - 345°

TOTAL LUMEN OUTPUT: 16802 LUMENS

MAXIMUM CANDELA: 2162 CANDELA

FIXTURE EFFICACY: 106.07 LUMENS/W*

*FIXTURE EFFICACY CAN BE INCREASED BY REDUCING DRIVER POWER.

POSEIDON


(NEED HEADER FOR THIS)

FINISH OPTIONS

HOUSING



SATIN CLEAR



WHITE




BLACK

END CAPS



MACHINED ALUMINUM



WHITE



BLACK



HYGIEIA IN CUSTOM RED

CUSTOM FINISHES

HOUSING



RAL POWDERCOAT



CUSTOM ANODIZED

END CAPS



RAL POWDERCOAT

CANOPIES



MACHINED ALUMINUM



RAL POWDERCOAT